

CDL/CDLF Series

Vertical Multistage Centrifugal Pump



Technical Data

- Thin, Clean, Non-flammable and Non-explosive liquid containing no Solid Granules and Fibers.
- Liquid temperature: Normal temp. type: - 15°C~+70°C Hot water type: - 15°C~+120°C

Ambient temperature: up to +40°C

Altitude: up to 1000m

Applications

- Cooling Water System
- Municipal Water supply & Boosting
- **Domestic Water supply**
- Irrigation
- General Industrial Services
- Washing Plants
- Boiler feed and Condensate System
- Water treatment

Motor

- Full-enclosed Air-blast Two-Pole Standard Motor
- Protection class: IP55
- Insulation class: F
- Standard voltage: 50Hz: 1x220-230/240V

3x200-220/346-380V


3x220-240/380-415V

3x380-415V

Features

- Our Vertical Multi Stage Centrifugal Pump is reliable and service-friendly, Space-saving, suitable for slightly aggressive liquids energy efficient.
- Close coupled vertical multistage pump with stainless steel parts which be driven by a standard TEFC motor, discharge and suction in the same line.
- Single phase motor up to 2.2 kW, Class F and IP55 are available.
- Standard supply for liquid temperature up to 700, high temperature pumps are available on request.
- Mechanical seal is Tungsten Carbide/Graphite, other material is available on request
- 60 Hz pumps are also available on request, please confirm performance curve before selection.

Performance Scope

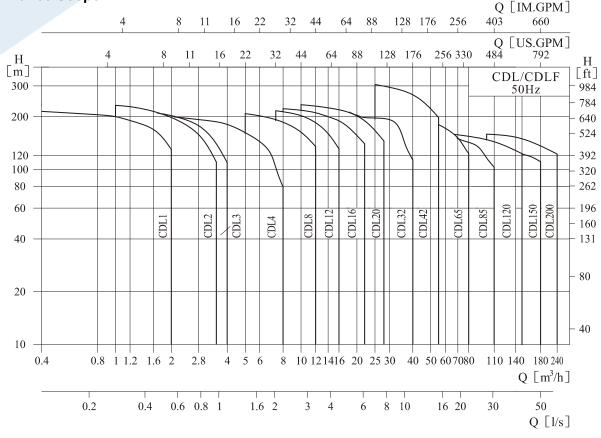



CNP PUMPS INDIA PVT. LTD.

Head office:

Plot No. B-5, 502, Sambhav IT Park, TJSB House, Behind Aplab Co., Wagle Ind. Estate, MIDC,

Thane - 400604 India. Tel.: 022 - 2582 8400

Website: www.cnpindia.com

Sales Enquiry:

E-mail: sales@cnpindia.com

Mob. No.: 9167226982 / 9920993097

Service Centre:

E-mail: service@cnpindia.com

Mob. No.: 9930994057 / 9820984062

9167226991

Factory: BHIWANDI

Branches: AHMEDABAD | BENGALURU BHUBANESWAR | CHANDIGARH | CHENNAI COIMBATORE | DELHI | GOA | HYDERABAD INDORE | JAIPUR | KOLHAPUR | KOLKATA MUMBAI | PUNE | SURAT | VADODARA