

CHL CHLK/CHLF(T) Series

Horizontal Multistage Centrifugal Pump



● Technical Data

- Flow range (Q) : 0.5 ~ 32.0 M³/hr
- Delivery Head : 8 ~ 88 mtr
- Liquid temperature : -15oC ~ +105oC
- MOC : CHL : Stainless Steel 304
CHLFT : Stainless Steel 316

● Applications

- Air conditioning system
- Cooling system
- Industrial System
- Water treatment (Water purification)
- Fertilizing / metering system
- Environment application


● Motor

- TEFC motor, 2-pole
- Protection class : IP 55
- Insulation class : F
- Single Phase : 2.4kW
- Standard voltage :
50Hz: 1 x 220-240V, 50Hz
3 x 220-240V/380-415V

● Features

- Rugged Construction, High efficiency,
- Dynamically balanced rotating components,
- Wetted parts coated with anti corrosive paint
- "O" ring sealing, High wear resistance Mechanical Seal

● Performance Scope

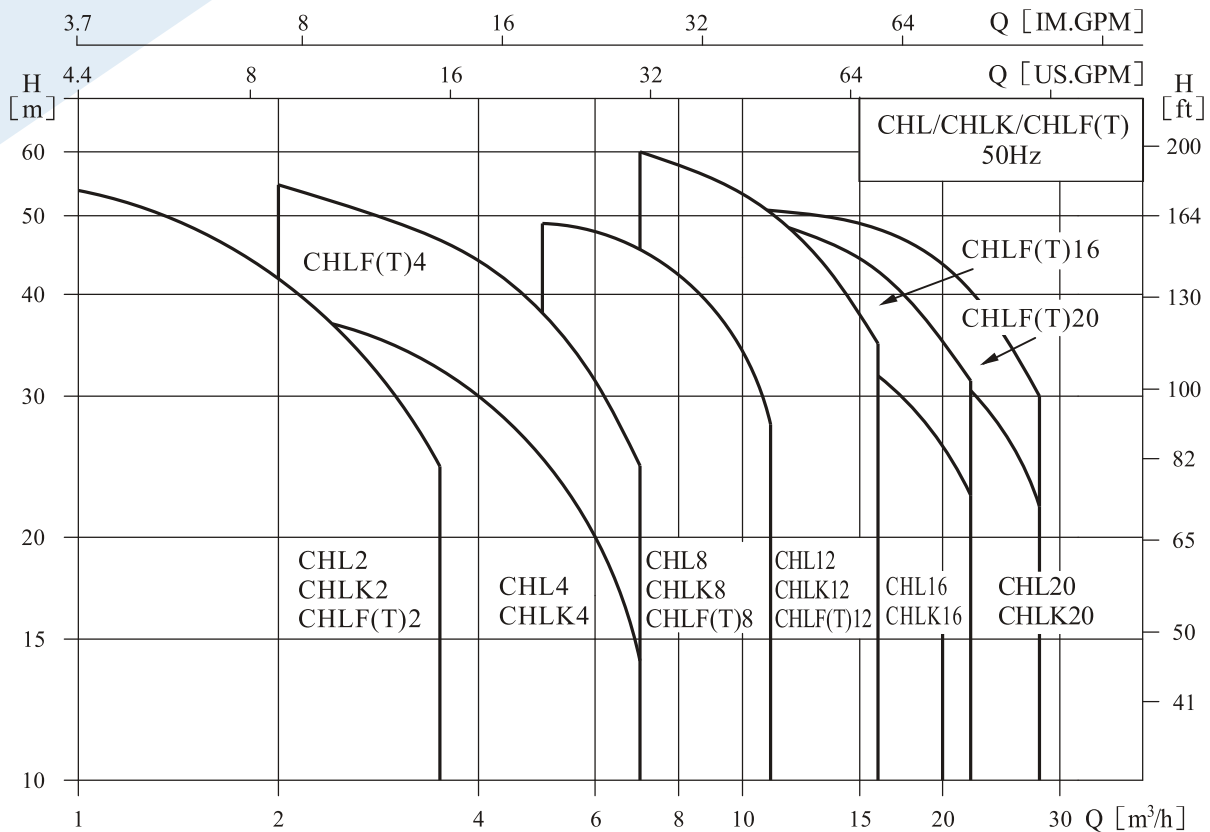

CNP PUMPS INDIA PVT. LTD.

Head office :

Plot No. B-5, 502, Sambhav IT Park,
TJSB House, Behind Aplab Co.,
Wagle Ind. Estate, MIDC,
Thane - 400604 India.
Tel.: 022 - 2582 8400
Website : www.cnpindia.com

Sales Enquiry :

E-mail : sales@cnpindia.com
Mob. No. : 9167226982 / 9920993097
Service Centre :
E-mail : service@cnpindia.com
Mob. No. : 9930994057 / 9820984062
9167226991

Factory : BHIWANDI

Branches : AHMEDABAD | BENGALURU
BHUBANESWAR | CHANDIGARH | CHENNAI
COIMBATORE | DELHI | GOA | HYDERABAD
INDORE | JAIPUR | KOLHAPUR | KOLKATA
MUMBAI | PUNE | SURAT | VADODARA